



# Instruction Manual Smart Control Panel



English

## Product Specifications

Product name	Smart Control Panel
Product model	CCP-TY-EU-LN
Input	100-240 VAC, 50/60Hz
Rated current	74mA
Wireless protocol	Wi-Fi, Zigbee
Working temperature	0°C-40°C
Working humidity	5%-90%RH non-condensing
Product size	86.0*86.0*10.5mm (without base) 86.0*86.0*36.2mm (including base)

Wireless Type	Frequency	Max.EIRP Power
Wi-Fi	2412-2472MHz	20 dBm
Bluetooth	2402-2480MHz	10 dBm
Zigbee	2405-2480MHz	10 dBm


## Packing list

- Smart Control Panel x1
- Screw x2
- Instruction Manual x1

## Installation preparation

1. This product is powered by the neutral wire, please arrange the neutral wire in advance.
2. This product is connected to the network via Wi-Fi, please arrange the Wi-Fi network.
3. Please prepare tools including screwdriver, test pencil, electrical tape, etc..
4. Please confirm the cassette's mounting hole distance with in 60±0.5mm, and the depth is over 40mm.
5. Do not operate with electricity.

## Interface Description

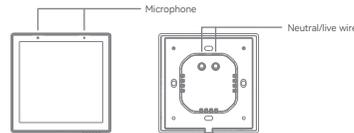

## Safety instructions ▲

To ensure the correct usage of this product, this product must be installed or disassembled by a professional electrician.  
The main power switch must be cut off before installing or disassembling this product to prevent electric shock. This product needs to be kept away from fire and water sources during installation and use.  
This product cannot be used in humid environments (such as bathrooms).  
Currently, the device does not support PoE power supply, thus please do not plug the PoE network cable into the network port to avoid burnout of the device.

## Installation instructions

- Turn off the circuit breaker and use the electrical tester to test the power.
- Ensure the circuit breaker is off before wiring.



### ▲ Attention:

Please disconnect the power supply before installing or removing the device for avoiding irreversible damage on the device from the electric current or some unpredictable problems.

1

2

English


English

3

4


English

- Remove the panel (as shown below):



Install upwards with the direction indicated by the arrow


## Wiring instructions



- Please connect according to the physical identification on the product

L: Live wire input  
N: Neutral wire input  
Stripping length 10mm

- Check the wiring to make sure that the copper wire is in good contact with the terminal and there is no exposed wire.
- Use the correct type of screws, countersunk screws for Asia-Pacific region, panhead screws for Europe region, to fix the base to the cassette, and then buckle back the panel.
- Please note that the screws should not be tightened too tightly during the installation process to avoid deformation or damage to the screen or hardware.
- If you encounter any problem with the installation, do not press too hard to force the installation. You should level the wall first and check the bracket.



5

6

English

English

7

8

English

## Download the APP

- ① APP Download Smart Life APP



Please scan the QR code or download Smart Life on App store.



- ② Registration or Log in.
  - Download "Smart Life" Application
  - Enter the Register/Login interface; tap "Register" to create an account by entering your phone number to get verification code and "Set password". Choose "Log in" if you already have a Smart Life account.

## Add Device

1. Turn on the power, and wait for the device to initiate. Connect to the network according to the instructions on the screen.
2. Open the App, then scan the QR code on the device to configure the network (as shown in the figure below), and perform related operations according to the instructions on the device interface after the commission is successfully finished.



\*The QR code is based on the display of actual device

- Device/scene overview: enter the corresponding entry in the smart control panel page of the App, tick the devices or scenes that need to be displayed on the screen.
- Voice control: enter the corresponding entrance in the smart control panel page of the App to configure the vocal scene.
- Gateway function: enter the corresponding entrance in the smart control panel page of the App, then add Zigbee devices.
- Setting: slide down at the top of the Smart Control Panel screen to call out the setting page.